



Screwdriver Bit Location Guide


Specialty bits - see index below




Allen bits




Torx bits




Phillips bits



Flat Head bits - see size chart below

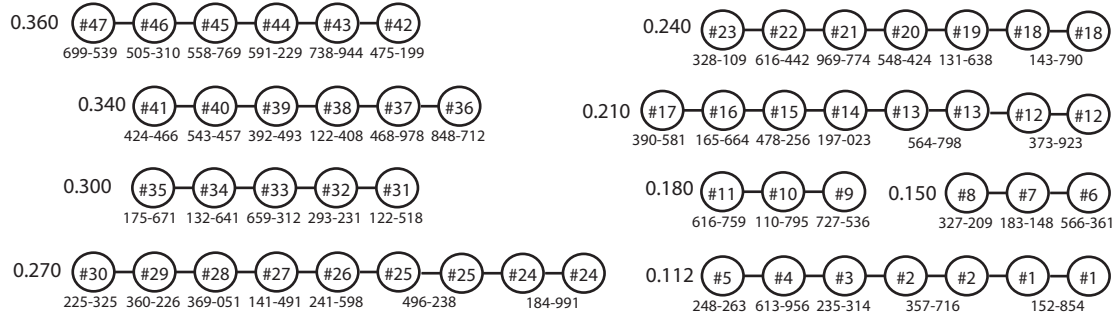

Key



Specialty bits - index

- A - Weaver/Ruger Scope Ring Clamp Bit
- B - Redfield Windage Screw Bit
- C - Leupold Windage Screw Bit
- D - Mauser Stock Bolt Bit
- E - Millett Rear Sight Adjustment Bit
- F - 1911 Grip Screw Bushing Driver
- G - Ruger/Cold SA Base Pin Latch Nut Bit
- H - M1/M14/M1A Rear Sight Bit

- I - .062" Pin Punch
- J - .093" Pin Punch
- K - .118" Pin Punch
- L - Remington M870/1100/1187 Trigger Plate Pin Punch
- M - 2" #2 Phillips
- N - Glock Replacement Front Sight Screw Bit
- O - S&W Rebound Spring Compressor Tool

Flat Head bits - size chart

Width: 0.360, Depth: 0.070, Thickness: (below)

- #47 - 0.070
- #46 - 0.060
- #45 - 0.050
- #44 - 0.040
- #43 - 0.035
- #42 - 0.030

Width: 0.340, Depth: 0.070

- #41 - 0.060
- #40 - 0.050
- #39 - 0.040
- #38 - 0.035
- #37 - 0.030
- #36 - 0.025

Width: 0.300, Depth: 0.070

- #35 - 0.060
- #34 - 0.050
- #33 - 0.040
- #32 - 0.035
- #31 - 0.030

Width: 0.270, Depth: 0.050

- #30 - 0.060
- #29 - 0.050
- #28 - 0.040
- #27 - 0.035
- #26 - 0.030
- #25 - 0.025
- #24 - 0.020

Width: 0.240, Depth: 0.050

- #23 - 0.050
- #22 - 0.045
- #21 - 0.040
- #20 - 0.035
- #19 - 0.030
- #18 - 0.025

Width: 0.210, Depth: 0.050

- #17 - 0.050
- #16 - 0.040
- #15 - 0.035
- #14 - 0.030
- #13 - 0.025
- #12 - 0.020

Width: 0.180, Depth: 0.040

- #11 - 0.035
- #10 - 0.030
- #9 - 0.025

Width: 0.150, Depth: 0.040

- #8 - 0.040
- #7 - 0.035
- #6 - 0.030

Width: 0.112, Depth: 0.040

- #5 - 0.040
- #4 - 0.035
- #3 - 0.030
- #2 - 0.025
- #1 - 0.020

Replacement bits available through MidwayUSA.com using the Wheeler part numbers.