



The 7 REST™

Assembly, Care & Usage Instructions

Limited Warranty


Every Caldwell product is warranted to be free of defects in materials and workmanship for a period of one (1) year from the date of original purchase. Caldwell will, at its option, repair or replace without charge, except for transportation costs, parts that fail under normal use and service when operated and maintained in accordance with our Instructions. This warranty does not apply to normal wear or to items whose life is dependent upon their use and care. This warranty is in lieu of all other warranties, expressed or implied and releases Caldwell, its affiliates, and its vendors from all other obligations and liabilities.



If you need help, call Battenfeld at 1-877-509-9160. Do not return product to store.

Thank you for purchasing a Caldwell 7 Rest.

Your rest comes preassembled in the box, and will require only a few minutes to fully assemble with no tools required. Please take a moment to verify that all the components listed are present, as shown in the photo below. Since we are always trying to improve our products, some components may vary slightly in appearance.

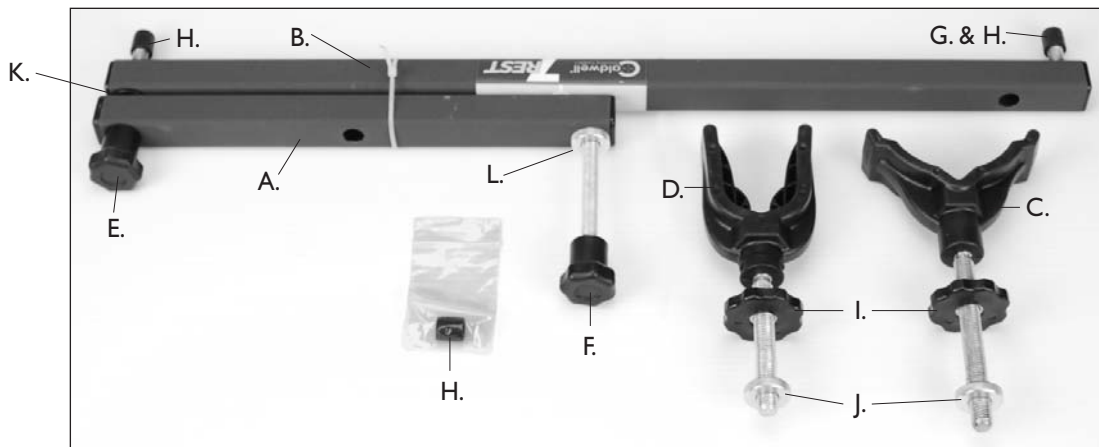

Components:

- | | | |
|-----------------------------|--|-----------------------------------|
| A. Front Tube, (1002305) | E. Front Leg – Short, (1002222, 1002943) | I. (2) Adjustment Nut, (1001980) |
| B. Main Tube, (1002302) | F. Front Leg – Long, (1003165, 1002943) | J. (2) Knurled Nut M12, (1002665) |
| C. Front Support, (1002495) | G. Rear Leg, (1002308) | K. (1) Washer, (1002607) |
| D. Rear Support, (1000888) | H. (3) Rubber Cap, (1002219) | L. (1) Knurled Nut M10, (1016592) |

Frame Assembly

To finish assembling your 7-Rest, first cut the tie that is holding the frame members together. Next swing the Front Tube out and Turn the Long Front Leg until the rest is level to the ground. When the rest is leveled to your liking, make sure you slip on the Rubber Cap onto the leg. (See Photo B)



Photo B

Front and Rear Supports

The Front Support (1002495) and Rear Support (1000888) should come with the Knurled Nut (1002665) and Adjustment Nut (1001980) pre-installed on the shafts. Assemble them as shown. (See Photo C, D and E)



Photo C

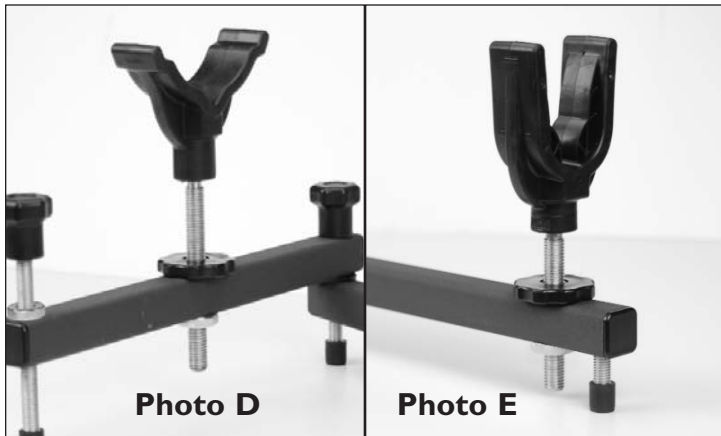


Photo D

Photo E

Your 7-Rest is now assembled. Read the usage instructions before using this product.

Usage Instructions

1. Place the unloaded Firearm onto the 7-Rest, resting the forend on the Front Support and the butt in the Rear Support. The stock should extend past the Rear Support.
2. Adjust or reposition the rest laterally to align the firearm's sights with the target. Adjust the height of the front support until the correct elevation is achieved. Course elevation adjustments are easily made by loosening the Adjustment Nut and Knurled Nut, and changing the height of the Front Support. Re-tighten the Adjustment Nut when the correct elevation is attained. The Rear Support can also be employed to raise and lower the rear of the firearm to give added elevation adjustment.
3. Turn the long front leg for fine elevation adjustment. Quick elevation changes can be made by sliding the firearm forward and backward, taking advantage of the shape of your firearm's stock.
4. Use the Knurled Nut on the Long Front Leg to lock the leg into place and eliminate any play.

Note: For best results store the 7-Rest in a clean and dry environment.



IMPORTANT SAFETY INFORMATION!

- Always practice safe firearm handling.
- Always hold the forend of the firearm when shooting off of the 7 Rest. If it is not held, the recoil can cause the forend to jump out of the support possibly causing damage to the firearm or injuring the shooter.

**If you need help,
call Battenfeld at 1-877-509-9160.
Do not return product to store.**

**Visit www.Caldwell Shooting.com
for additional info and other
great Caldwell products.**

5885 West Van Horn Tavern Road
Columbia, MO 65203
www.caldwellshooting.com

Product #101557

Instruction #1006449