

DeadShot[®] FieldPod[™] MAX



Assembly and Usage Instructions

Product #488029
Instruction #I046698
Revision A



STOP!

If you have a problem with this product, **DON'T RETURN IT TO THE STORE WHERE YOU PURCHASED IT.** Contact customer service at...

Battenfeld[®]
Technologies, Inc.

2501 LeMone Industrial Blvd. / Columbia, MO 65201
573-445-9200 / Email: sales@battenfeldtechnologies.com
Or visit our website @ [www. BTIbrands.com](http://www.BTIbrands.com)

NOT WARRANTED AGAINST MISUSE, ABUSE, OR COMMERCIAL USE.

Limited Warranty

Every Caldwell product is warranted to be free of defects in materials and workmanship for a period of one (1) year from the date of original purchase. Caldwell will, at its option, repair or replace without charge, except for transportation costs, parts that fail under normal use and service when operated and maintained in accordance with our Instructions. This warranty does not apply to normal wear or to items whose life is dependent upon their use and care. This warranty is in lieu of all other warranties, expressed or implied and releases Caldwell, its affiliates, and its vendors from all other obligations and liabilities.




WARNING IMPORTANT SAFETY INFORMATION

- Read these instructions in their entirety before using this product. Failure to follow this warning could result in property damage, injury or even death.
- Always follow basic gun safety rules while using this product.
- This product is intended for use by adults or under strict supervision of an adult.
- To prevent the rest from tipping over, care must be taken at all times a gun or other weapon is placed on it.
 - 1) Adjust the position of the Rail Assembly to achieve proper balance when the unloaded weapon is resting in the Forks.
 - 2) Be careful to not bump the gun, other weapon or the rest.
- Hold gun or other weapon securely with both hands and keep contact between the rear of the stock and shoulder at all times while aiming and firing. The rest is not intended to absorb recoil from any gun or weapon.

Thank you for purchasing a Caldwell DeadShot FieldPod MAX. Your DeadShot FieldPod MAX is fully assembled and ready for use. Please read these instructions completely before initial use. Improper deployment can damage the DSFP MAX.

PHOTO 1

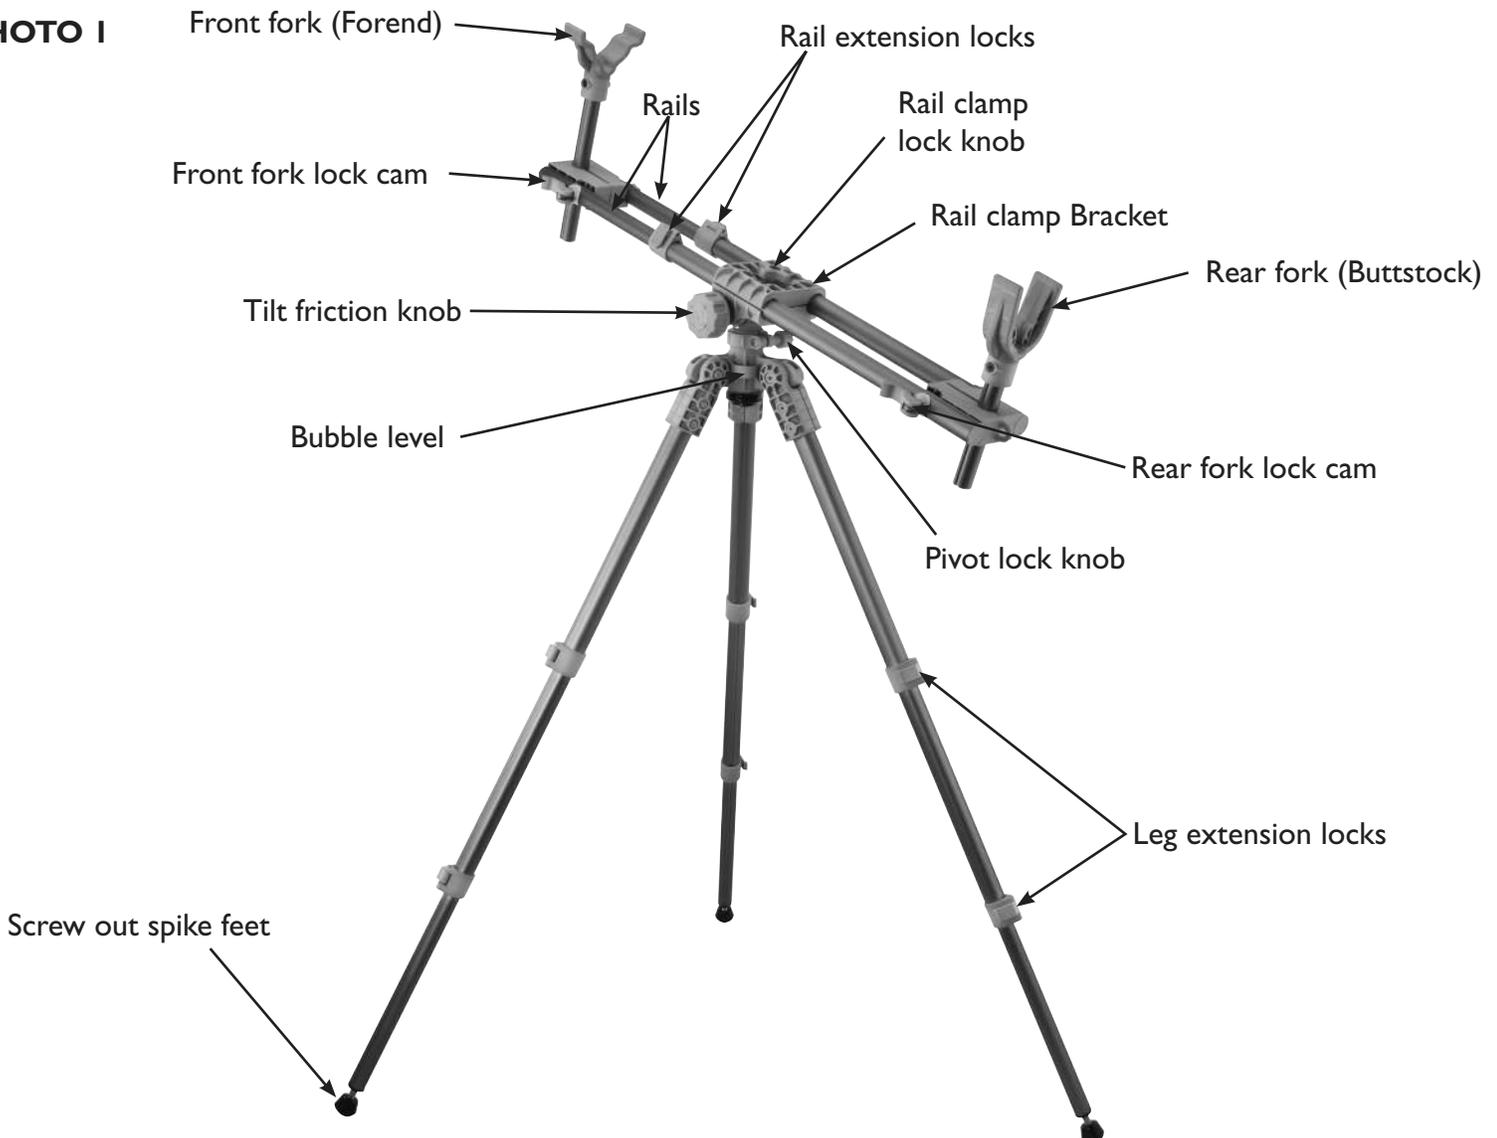

Deployment and Use:

For the initial deployment and familiarization of the DSFP MAX, you may find it easier to work on a table top as we have done here in steps 1 through 12.

1. Loosen Rail Clamp Lock Knob and Tilt Friction Knob until tension is reduced. (See PHOTO 2)

NOTE: This knob will be positioned under the Rear Fork but is still accessible.

2. Rotate Rails away from Legs and slide the Rails until the Rail Clamp Brackets are near the middle of the Rails. (See PHOTO 3)



PHOTO 2

PHOTO 3



3. Release both the Front and Rear Fork Cam Locks. Rotate the Front and Rear Fork into the upright position and re-engage the front and rear cam locks. (See PHOTO 4)

NOTE: The Front Fork is wider and flatter than the Rear Fork. It is easier to deploy and fold the Rear Fork when the Rail Clamp Brackets are not too close to the fork.

4. With the Rail Clamp Bracket near the middle of the Rails, tighten the Rail Clamp Lock Knob slightly. (See PHOTO 5)

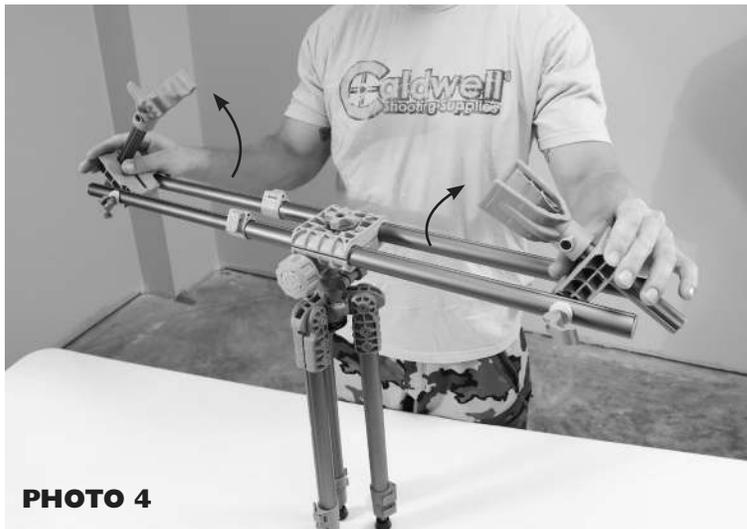


PHOTO 4




PHOTO 5

5. Open the three tripod legs but do not extend them to full length yet.

6. Place the rest on a flat stable surface. Adjust the Rails so they are parallel with the ground and tighten the Tilt Friction Knob securely. (See PHOTO 6).

7. Place the unloaded firearm on the rest being sure it is pointed in a safe direction. More tension may need to be added to the Tilt Friction Knob to prevent the rest from tilting from the weight of the gun. (See PHOTO 7)

NOTE: Before placing the unloaded firearm in the DSFP MAX, it is a good idea to find the balance point of your firearm by balancing it in your palm. This center balance point should be directly over the center post of your tripod base.

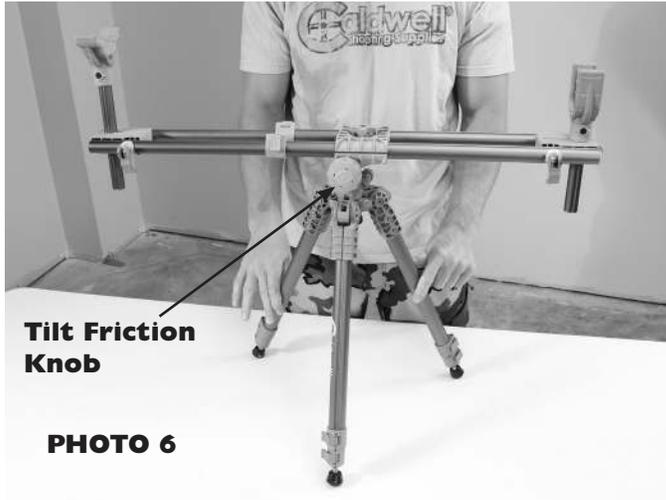

8. With the firearm removed, unlock the two Rail Extension Locks and adjust the length of the Rails to the desired position along the foreand of the gun. Re-engage locks once length is set. (See PHOTO 8)

9. The Front and Rear Forks can be adjusted up and down to allow the gun to be near parallel with the Upper Fame and to allow clearance for extended magazines. Once positioned, secure both Fork Cam Lock. (See PHOTO 9)



10. Once the Rail length and Fork height are set to desired positions, loosen the Rail Clamp Lock Knob and remove tension from the Tilt Friction Knob being careful to support the Upper Frame to prevent it from tilting.

11. Slide the Rails through the Rail Clamp Lock Brackets until the gun is balanced evenly and does not want to tilt forward or back. Re-tighten the Rail Clamp Lock Knob. (See PHOTO 10)

NOTE: It may be necessary to reposition the firearm in the forks to achieve balance if you run out of adjustment.

NOTE: When using extended magazine rifles, the front and rear forks may be extended to a high position for clearance above the Frame Clamp. The forks can also be lowered to allow the magazine to fit between the Upper Frame Tubes. (See PHOTO 11) Select the position that provides the best balance for your firearm.



WARNING

Step 11 is important to ensure maximum stability of the rest.



12. Adjust the tension on the Tilt Friction Knob to provide the desired resistance for up/down aiming.



WARNING

At any time the shooter is not actively aiming the gun by hand, the Tilt Friction Knob should be tightened to the point of preventing unintentional tilting.

13. Remove firearm and adjust the height of the rest by unlocking the Leg Extension Locks and extending the leg sections as needed. (See PHOTO 12)

NOTE: The rest can be adjusted for comfortable shooting while seated on the ground or in a chair.

NOTE: If rest is being used on uneven ground, be sure to use the bubble level and adjust each leg so that the rail assembly is level. This will ensure the rest will track level left and right rather than in an arc.





WARNING

After setup is complete, make yourself familiar with the stability of the rest. Know the operations of the rest and the limitations before you place a loaded firearm on it.


Collapse for Transportation:

1. Remove gun or other weapon from rest, unload and make safe.
2. Disengage leg extension locks and fully collapse sections on all three legs. Re-engage Leg Extension Locks once in collapsed position.
3. Loosen all knobs and cams: Front and Rear Fork Lock Cam, Rail Clamp Lock Knob, Pivot Lock Knob and Tilt Friction Knob.
4. Fold the Front and Rear Forks 90 degrees into the down position. (See PHOTO 13)
5. Collapse the Legs inward. (See PHOTO 14)

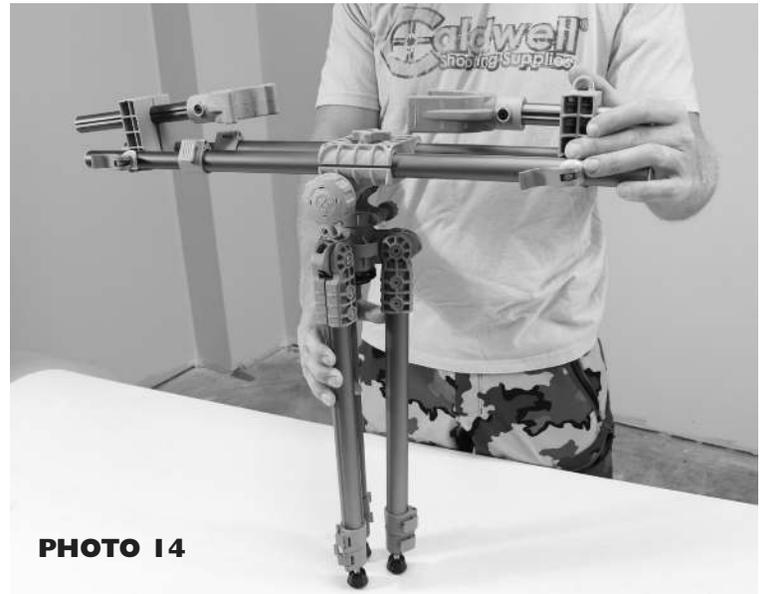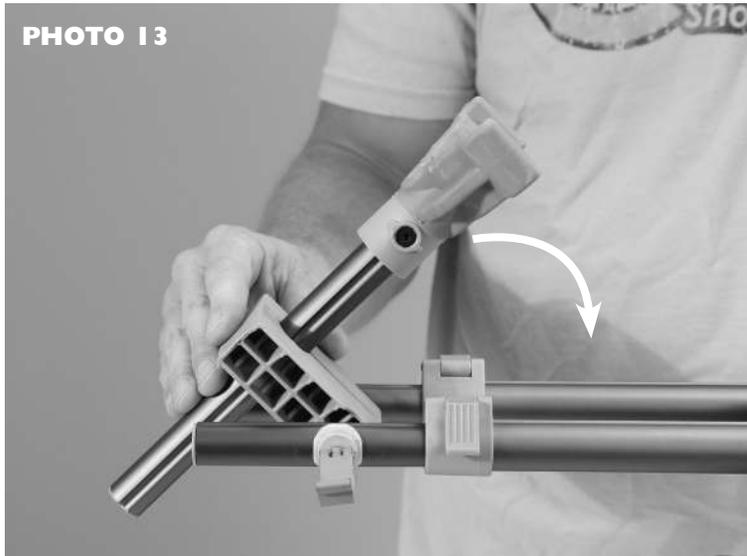

6. Adjust the length of the Rails out until they clear the length of the collapsed legs. (See PHOTO 15 and PHOTO 17)

7. Slide the Rails forward until the Rail Clamp Lock Brackets contacts the Rear Fork Brace. (See PHOTO 16)

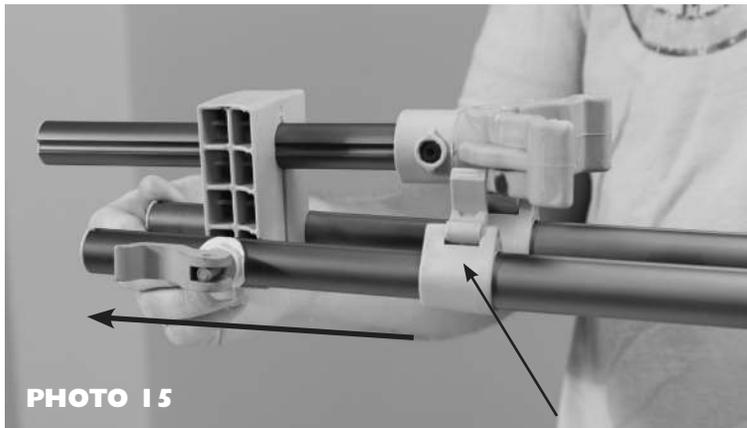

Unlock Rail Extension Locks and slide front end out.



8. Tilt the Rails down allowing the Leg OPPOSITE the Pivot Tension Knob to seat between the two Upper Frame Rails. (See PHOTO 17)

9. Tighten all knobs and Cams to keep the rest secure in the collapsed position.

10. The Carry Strap can be clipped onto the Rear Fork Brace and then looped around the opposite end of the rest further securing the legs to the Upper Frame. (See PHOTO 18)



**NOTE: Do not lubricate the Tilt Friction Assembly.
Your DSFP MAX comes fully assembled and ready to use.**



2501 LeMone Industrial Blvd. / Columbia, MO 65201
573-445-9200 / Email: sales@battenfeldtechnologies.com